# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## **Technical Data Sheet**

## Full Color Chip LED (Chip LED with Right Angle Lens)

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Full-color type.
- Pb-free.

#### Descriptions

- The 12-23A SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


#### **Device Selection Guide**

Туре	Material	<b>Emitted</b> Color	Lens Color	
R6	AlGaInP	Brilliant Red		
GH	InGaN	Brilliant Green	Water Clear	
BH	InGaN	Blue		



12-23A/R6GHBHC-A01/2D

#### **Package Outline Dimensions**

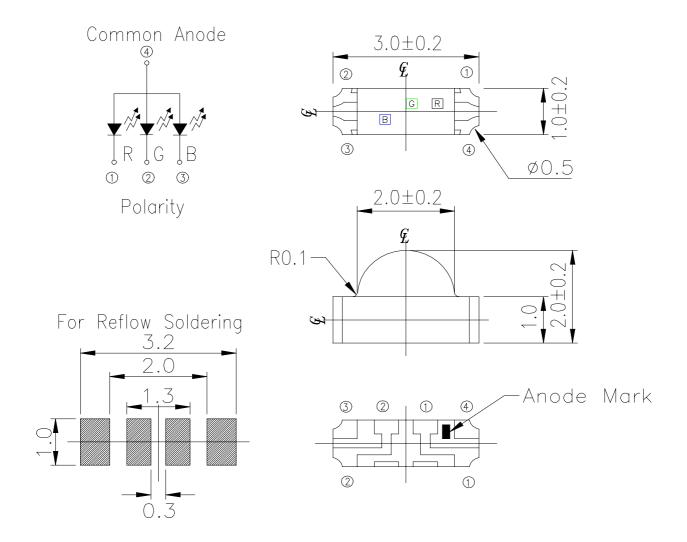

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm

http://www.everlight.com Prepared date: 04-05-2004 EVERLIGHT ELECTRONICS CO., LTD.

## 12-23A/R6GHBHC-A01/2D

## Absolute Maximum Ratings (Ta=25°C)

**ÆRLIGHT** 

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	IF	R6:25 GH:25 BH:25	mA
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	260 (for 5 seconds)	°C
Electrostatic Discharge	ESD	R6:2000 GH:150 BH:150	V
Power Dissipation	Pd	R6:60 GH:110 BH:110	mW
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	R6:60 GH:100 BH:100	mA

EVERLIGHT ELECTRONICS CO.,LTD.

## 12-23A/R6GHBHC-A01/2D

## Electro-Optical Characteristics (Ta=25°C)


**ÆRLIGHT** 

Parameter	Symbol		Min.	Тур.	Max.	Unit	Condition
		R6	50	80			
Luminous Intensity	Iv	GH	125	160		mcd	IF=20mA
		BH	25	40			
Viewing Angle	20	1/2		120		deg	IF=20mA
		R6		632			
Peak Wavelength	$\lambda  p$	GH		518		nm	IF=20mA
		BH		468			
		R6		624			
Dominant Wavelength	$\lambda d$	GH		525		nm	IF=20mA
		BH		470			
Spectrum Dediction		R6		20			
Spectrum Radiation Bandwidth	$ riangle \lambda$	GH		35		nm	IF=20mA
		вн		35			
		R6		2.0	2.4		
Forward Voltage	VF	GH		3.5	3.9	V	IF=20mA
		BH		3.5	3.9		
		R6			10		
Reverse Current	IR	GH			50	$\mu A$	Vr=5V
		BH			50		

Everlight Electronics Co., Ltd. Device No:DSE-123-004 http://www.everlight.com Prepared date: 04-05-2004 Rev 1.1 Page: 4 of 12 Prepared by: Kenny Wang

## **Typical Electro-Optical Characteristics Curves**

## R6

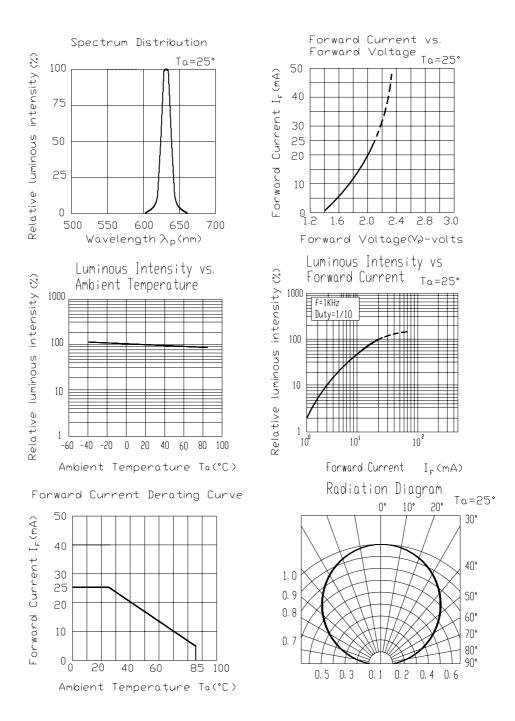


Everlight Electronics Co., Ltd. Device No:DSE-123-004 http://www.everlight.com Prepared date: 04-05-2004 Rev 1.1 Page: 5 of 12 Prepared by: Kenny Wang

#### **Typical Electro-Optical Characteristics Curves**

GH

**ÆRLIGHT** 

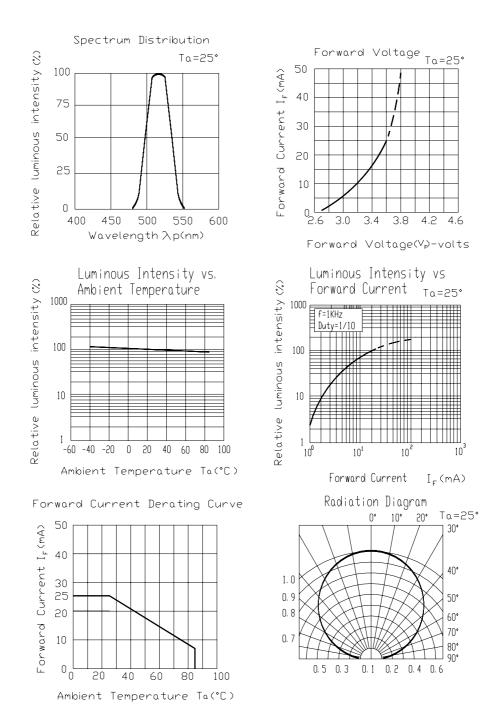


Everlight Electronics Co., Ltd. Device No:DSE-123-004 http://www.everlight.com Prepared date: 04-05-2004 Rev 1.1 Page: 6 of 12 Prepared by: Kenny Wang

#### **Typical Electro-Optical Characteristics Curves**

BH

**ÆRLIGHT** 

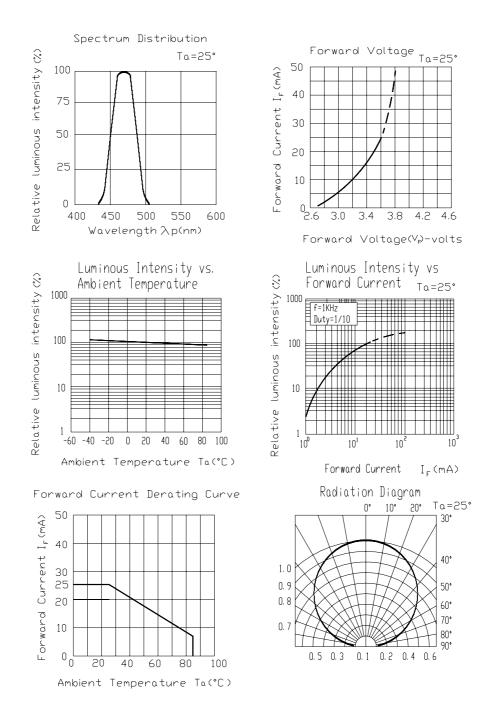

Everlight Electronics Co., Ltd. Device No:DSE-123-004 http://www.everlight.com Prepared date: 04-05-2004 Rev 1.1 Page: 7 of 12 Prepared by: Kenny Wang

## **VERLIGHT** EVERLIGHT ELECTRONICS CO.,LTD.


## 12-23A/R6GHBHC-A01/2D

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**




#### **Reel Dimensions**

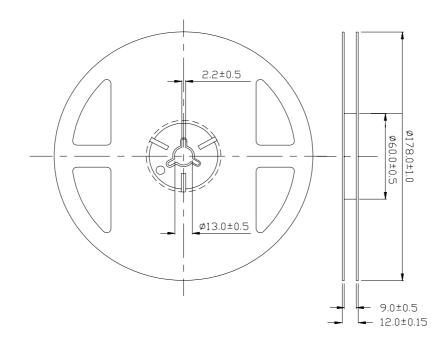

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm


Everlight Electronics Co., Ltd. Device No:DSE-123-004 http://www.everlight.com Prepared date: 04-05-2004 Rev 1.1 Page: 8 of 12 Prepared by: Kenny Wang

#### **Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel**

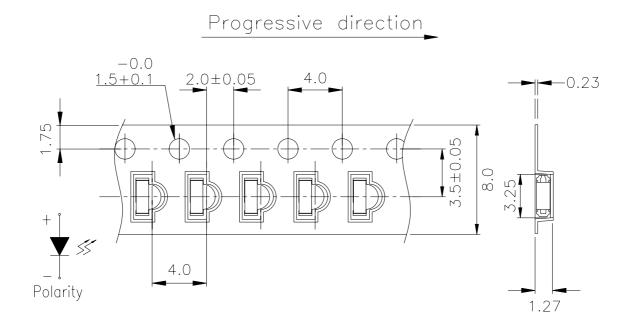

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

#### **Moisture Resistant Packaging**

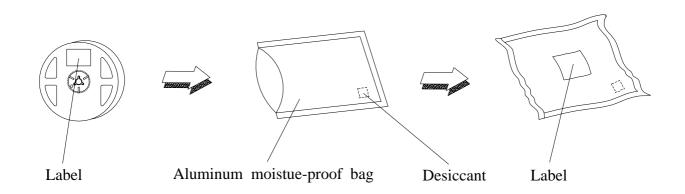

http://www.everlight.com Prepared date: 04-05-2004

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int$ 10 sec L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

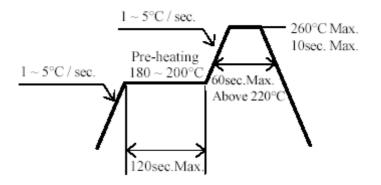


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

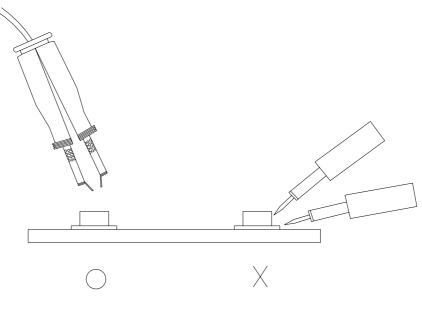

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No:DSE-123-004 http://www.everlight.com Prepared date: 04-05-2004 Rev 1.1 Page: 12 of 12 Prepared by: Kenny Wang