

Technical Data Sheet Side View SMD LEDs

57-21/GHC-AT1U2M/BF

Features

- High Luminous Intensity
- High Efficiency
- Pb-free.
- The product itself will remain with RoHS compliant version



Descriptions

The 57-21series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

(
Material Emitted Color		Lens Color	
InGaN	Bluish Green	Water Clear	

Everlight Electronics Co., Ltd.

Device No. :DSE-571-011

http://www.everlight.com

Prepared Date:22-Sep-2006


Rev. 1

Page: 1 of 10

Prepared by:Ya_Hui Fang

57-21/GHC-AT1U2M/BF

Package Dimensions

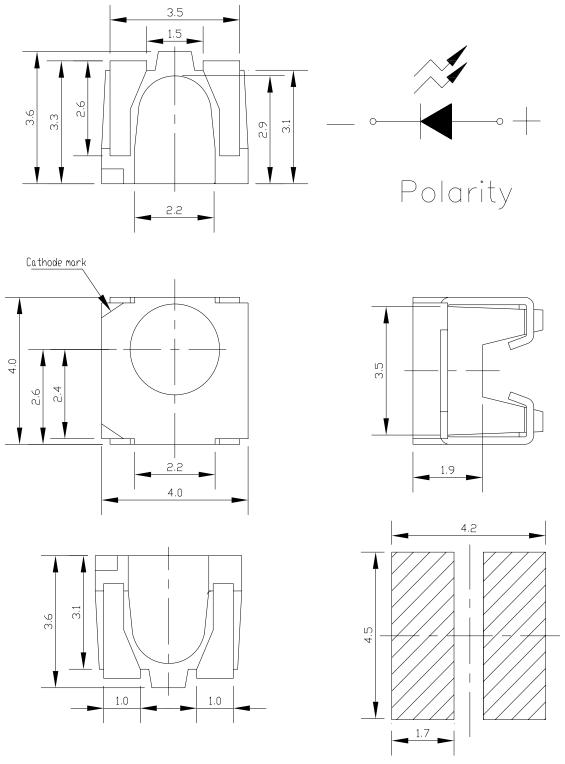

Recommended soldering pad design

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: DSE-571-011

http://www.everlight.com

Prepared Date:22-Sep-2006

Rev. 1

Page: 2 of 10

Prepared by:Ya_Hui Fang



57-21/GHC-AT1U2M/BF

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	I F	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	150	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering : 260 °C Hand Soldering : 350 °C	

Electro-Optical Characteristics (Ta=25°C)

_							
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	285		715	mcd	I _F =20mA	
Viewing Angle	2 0 1/2		120		deg	I _F =20mA	
Peak Wavelength	λр		518		nm	I _F =20mA	
Dominant Wavelength	λd	517.5		535.5	nm	I _F =20mA	
Spectrum Radiation Bandwidth	Δλ		35		nm	I _F =20mA	
Forward Voltage	V_{F}	2.75		3.95	V	I _F =20mA	
Reverse Current	I_R			10	μ A	V _R =5V	

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd.

Device No.: DSE-571-011

http://www.everlight.com

Prepared Date:22-Sep-2006

Rev. 1

Page: 3 of 10

Prepared by:Ya_Hui Fang



57-21/GHC-AT1U2M/BF

Page: 4 of 10

Bin Range Of Dominant Wavelength

Group	Bin Code	Min	Max	Unit	Condition
	B10	517.5	519.5		
	B11	519.5	521.5		
	B12	521.5	523.5		
	B13	523.5	525.5		
A	B14	525.5	527.5	nm	$I_F=20mA$
	B15	527.5	529.5		
	B16	529.5	531.5		
	B17	531.5	533.5		
	B18	533.5	535.5		

Bin Range Of Luminous Intensity

0				
Bin Code	Min	Max	Unit	Condition
T1	285	360	- mcd	I _F =20mA
T2	360	450		
U1	450	565		
U2	565	715		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
M	5	2.75	3.05			
	6	3.05	3.35	17	I _F =20mA	
	7	3.35	3.65	V		
	8	3.65	3.95			

Notes:


- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1


Device No. :DSE-571-011 Prepared Date:22-Sep-2006 Prepared by:Ya_Hui Fang


57-21/GHC-AT1U2M/BF


Typical Electro-Optical Characteristics Curves

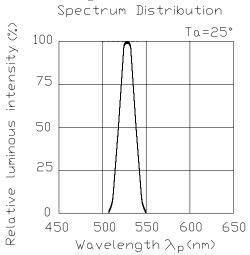


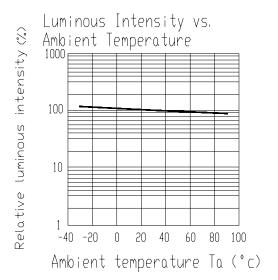

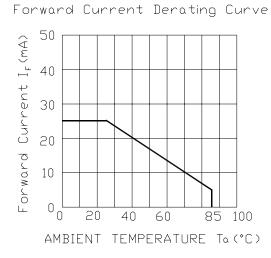

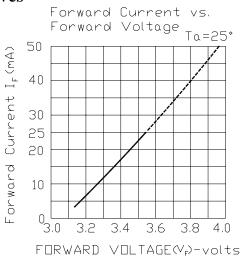

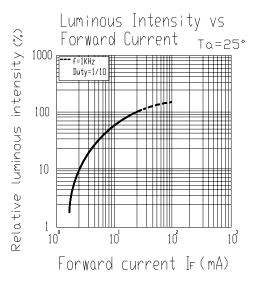






57-21/GHC-AT1U2M/BF

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank

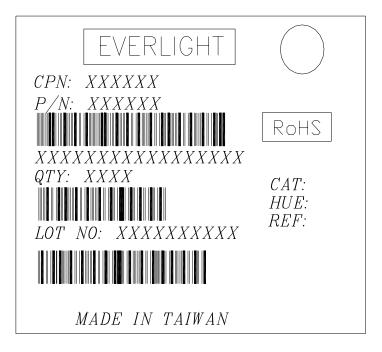

Reel Dimensions

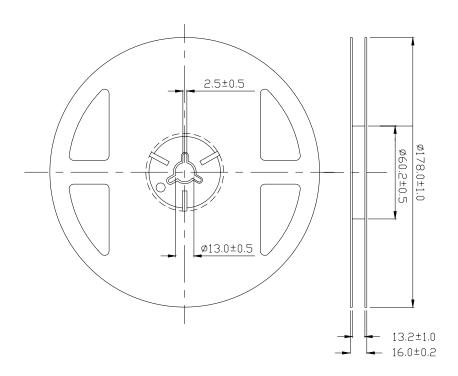


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm




57-21/GHC-AT1U2M/BF

Carrier Tape Dimensions: Loaded quantity 500 PCS per reel.

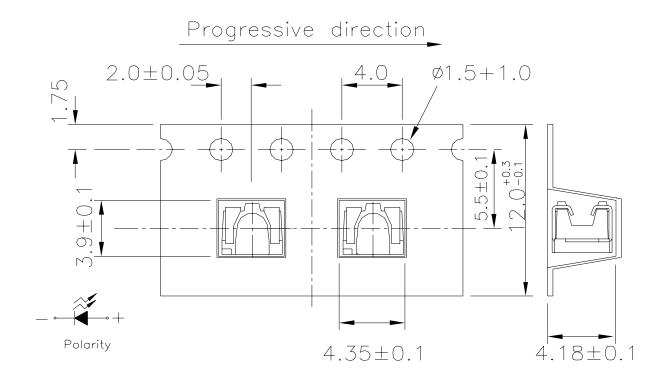

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

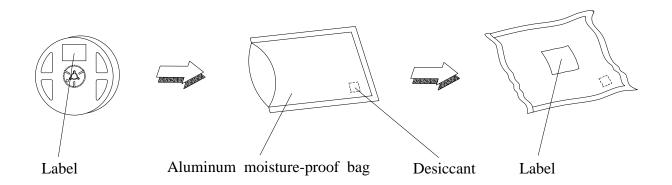

Everlight Electronics Co., Ltd. Device No. :DSE-571-011

http://www.everlight.com Prepared Date:22-Sep-2006 Rev. 1 Page: 7 of 10 Prepared by:Ya_Hui Fang



57-21/GHC-AT1U2M/BF

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°€	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1



57-21/GHC-AT1U2M/BF

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

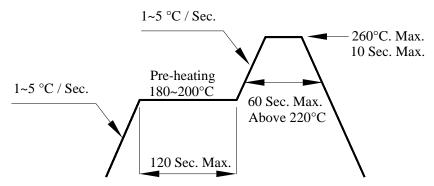

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com

Device No.:DSE-571-011 Prepared Date:22-Sep-2006

Prepared Date:22-Sep-2006 Prepared by:Ya_Hui Fang

Rev. 1


Page: 9 of 10



57-21/GHC-AT1U2M/BF

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

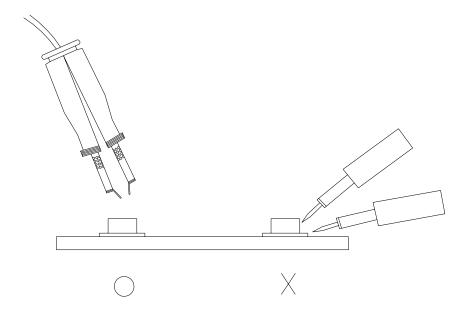

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10

Device No.:DSE-571-011 Prepared Date:22-Sep-2006 Prepared by:Ya_Hui Fang