EVERLIGHT

EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet(Preliminary)

TOP View LEDs

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS
- compliant version.

Descriptions

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide

	Chip	Long Color
Material	Emitted Color	Lens Color
AlGaInP	Brilliant Red	Water Clear

http://www.everlight.com prepared date:3-Oct-2005







EVERLIGHT ELECTRONICS CO., LTD.


67-21/R6C-FN2Q1BZ/2T


Package Dimensions







Polarity





For reflow soldering (Proposal)





Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. :DSE-671-286 http://www.everlight.com prepared date:3-Oct-2005 Rev. 1.0Page: 2 of 10Prepared by: Ray Yuan

Absolute Maximum Ratings (Ta=25°C)

Absolute Maximum Katings (1a=23 C)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	VR	5	V		
Forward Current	IF	25	mA		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +100	°C		
Electrostatic Discharge(HBM)	ESD	2000	V		
Power Dissipation	Pd	120	mW		
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA		
		Reflow Soldering : 260 $^{\circ}$ C for 10 sec.			
Soldering Temperature	Tsol	Hand Soldering : 350 $^{\circ}$ C for 3 sec.			

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous intensity	Iv	36		90	mcd	IF=10mA
Viewing Angle	2 0 1/2		120		deg	IF=10mA
Peak Wavelength	λp		632		nm	IF=10mA
Dominant Wavelength	λd	621		631	nm	IF=10mA
Spectrum Radiation Bandwidth	Δλ		20		nm	IF=10mA
Forward Voltage	VF	1.75		2.35	V	IF=10mA
Reverse Current	Ir			10	μ A	Vr=5V

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Bin Range Of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition
F	FF1	621	626		I _F =10mA
	FF2	626	631	nm	IF=10IIIA

Bin Rang Of Luminous Intensity

0	· · · · ·			
Bin	Min	Max	Unit	Condition
N2	36	45		IF=10mA
P1	45	57	mad	
P2	57	72	– mcd	
Q1	72	90		

Bin Rang Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
	0	0 1.75 1.95			
В	1	1.95	2.15	V	I _F =10mA
	2	2.15	2.35		

Notes:


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V



Typical Electro-Optical Characteristics Curves

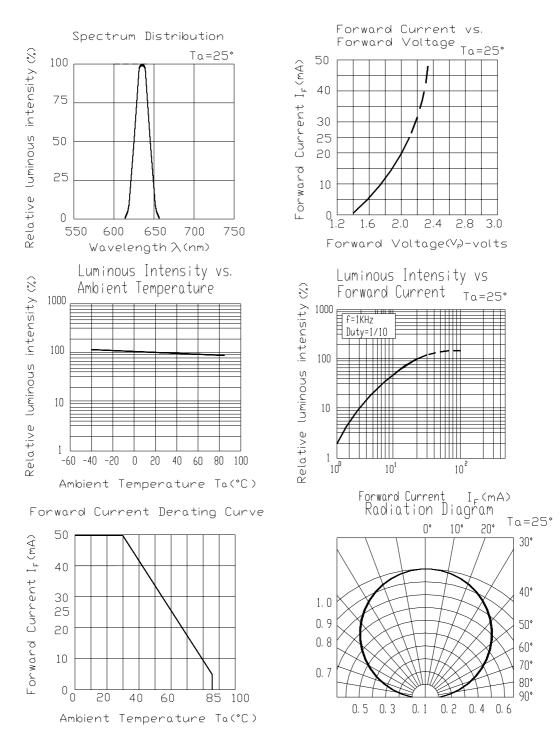

Everlight Electronics Co., Ltd. Device No. :DSE-671-286 http://www.everlight.com prepared date:3-Oct-2005 Rev. 1.0Page: 5 of 10Prepared by: Ray Yuan




Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

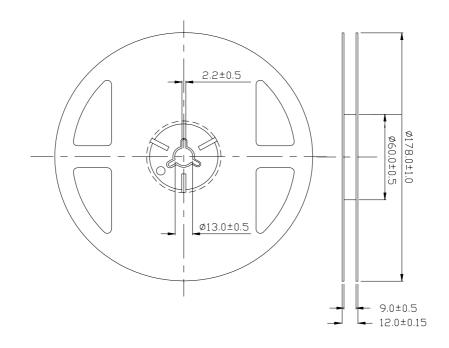


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

http://www.everlight.com prepared date:3-Oct-2005




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

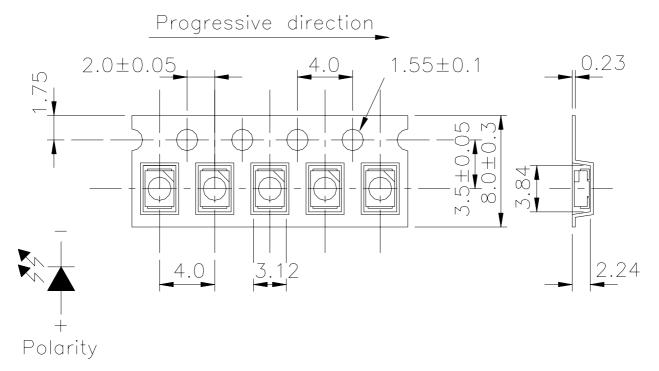

Note: The tolerances unless mentioned is ± 0.1 mm Unit = mm

Moisture Resistant Packaging

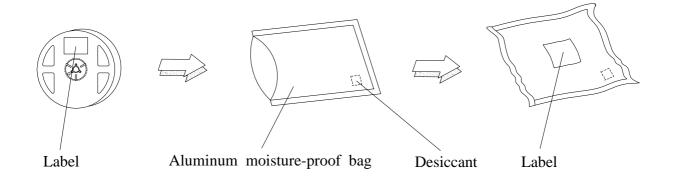

Everlight Electronics Co., Ltd. Device No. :DSE-671-286 http://www.everlight.com prepared date:3-Oct-2005 Rev. 1.0Page: 7 of 10Prepared by: Ray Yuan



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min \int 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

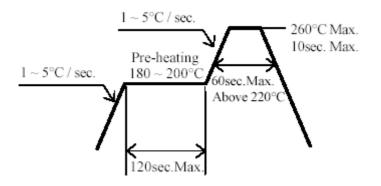


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

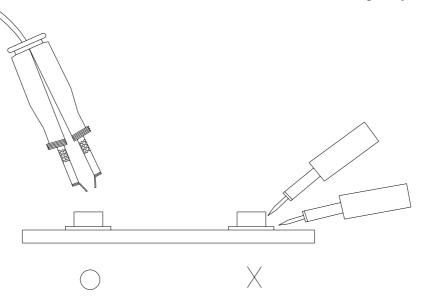

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. :DSE-671-286 http://www.everlight.com prepared date:3-Oct-2005 Rev. 1.0 Page: 10 of 10 Prepared by: Ray Yuan