EVERLIGHT ELECTRONICS CO., LTD.

# **Technical Data Sheet**

EVERLIGHT

# **1.9mm Round Subminiature Lead LEDs**

#### Features

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic
- placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

#### Descriptions

- The 91-21 SMD taping is much smaller than leaded components . Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.

#### Applications

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches.
- Telecommunication : indicator and backlighting in telephone and fax.

#### **Device Selection Guide**


	Chip	Lana Calan	
Material	<b>Emitted Color</b>	Lens Color	
AlGaInP	Brilliant Yellow	Water Clear	

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com

Prepared date:07-29-2005

Rev. 2.1 Page: 1 of 10 Prepared by: Forrest Chen

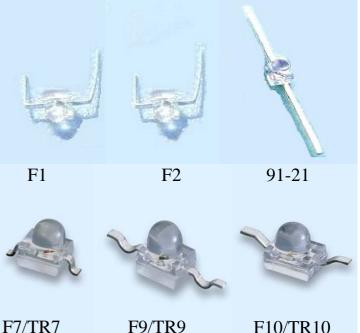


91-21UYC/S530-XX/XXX


F10/TR10




# Package Outline Dimensions

















91-21F9/TR9




91-21UYC/S530-XX/XXX







91-21F7/TR7



91-21F10/TR10

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 2 of 10 Prepared by: Forrest Chen

# Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	260 for 5 Sec.	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	IFP	60	mA

### **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Chip Rank	MIN.	TYP.	MAX.	Unit	Condition	
	Iv	A2		32		mcd	IF=2mA	
			198	529			IF=20mA	
		A3		43			IF=2mA	
			463	714			IF=20mA	
Torres Internetion		A4		54			IF=2mA	
Luminous Intensity			661	892			IF=20mA	
		A5		69			IF=2mA	
			793	1156			IF=20mA	
		A6		87			IF=2mA	
			991	1454			IF=20mA	
Viewing Angle	2 0 1/2			25		deg		
Peak Wavelength	ngth $\lambda p$			591		nm		
Dominant Wavelength	λd			589		nm	IF=20mA	
Spectrum Radiation Bandwidth	Δλ			15		nm		
Forward Voltage	VF			2.0	2.4	V		
Reverse Current	IR				10	$\mu A$	VR=5V	

Everlight Electronics Co., Ltd.

**Device No. : DLE-912-302** 

http://www.everlight.com

Rev. 2.1

Page: 3 of 10


Prepared date:07-29-2005

Prepared by: Forrest Chen

EVERLIGHT

### 91-21UYC/S530-XX/XXX

#### **Typical Electro-Optical Characteristics Curves**

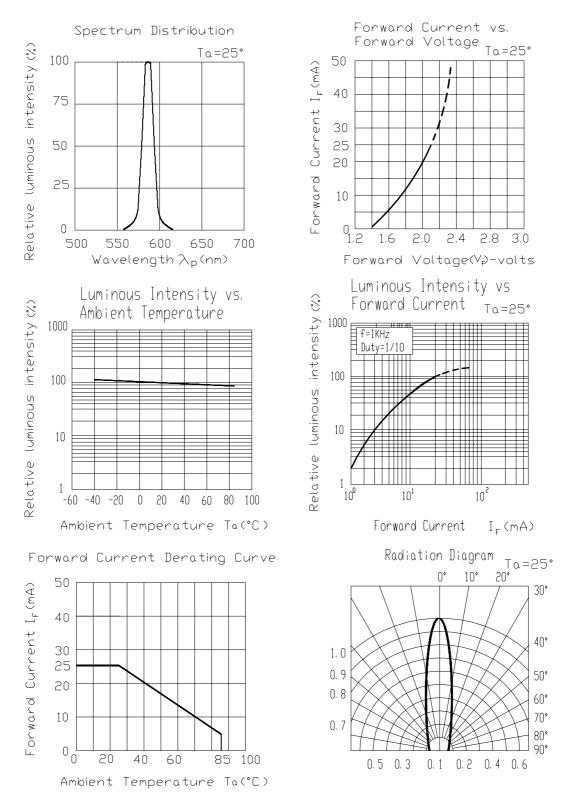

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 4 of 10 Prepared by: Forrest Chen




#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



#### **Reel & Carrier Tape Dimensions**

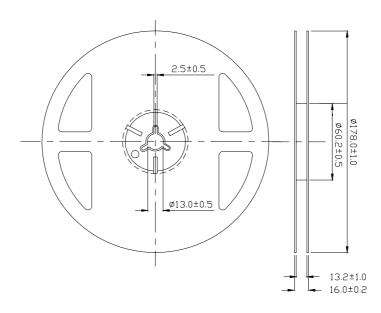


Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 


http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 5 of 10 Prepared by: Forrest Chen



### Loaded quantity per reel 1000 PCS/reel

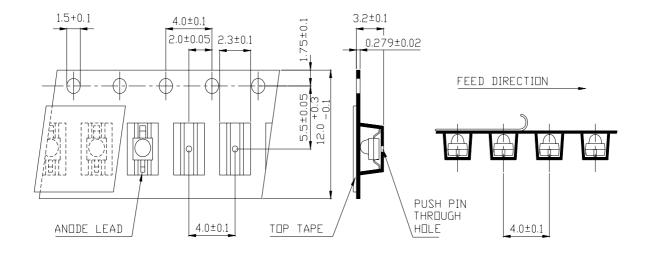

**TR7** 

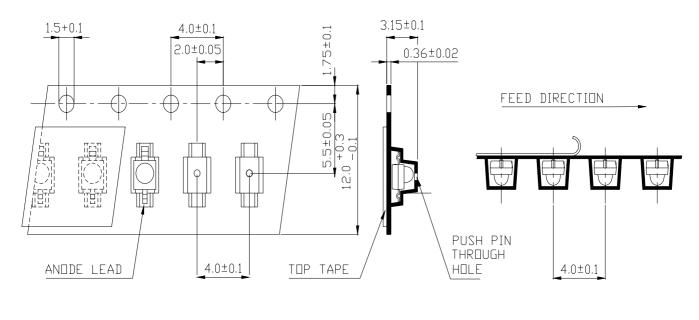


TR9

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 6 of 10 Prepared by: Forrest Chen




### Loaded quantity per reel 1000 PCS/reel

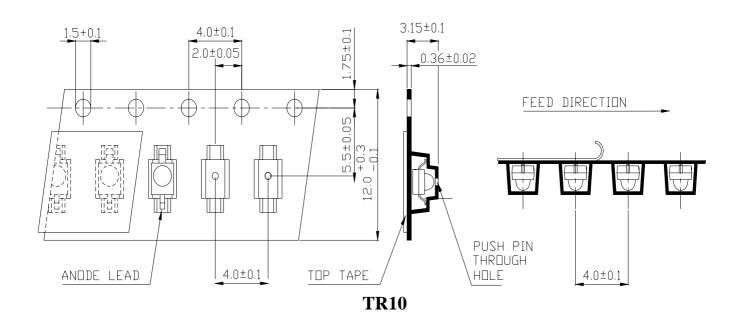

Unit :mm

### **Moisture Resistant Packaging**

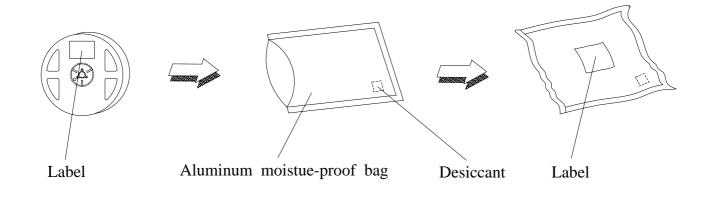

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 7 of 10 Prepared by: Forrest Chen



### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90 %

LTPD : 10 %

No.	Items Test Condition		Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H : +100°C 15 min. $\int 5 \text{ min.}$ L : -40°C 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H: +100°C 5 min. $\int 10 \sec.$ L: -10°C 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	<b>Temp.</b> : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°℃	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 Pcs.	0/1


#### **Precautions For Use**

ERLIGH

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

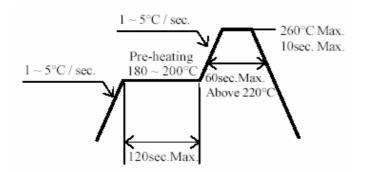

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 9 of 10



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

**EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. **Device No. : DLE-912-302** 

http://www.everlight.com Prepared date:07-29-2005 Rev. 2.1 Page: 10 of 10 Prepared by: Forrest Chen